

3M™ UV Resistant Masking Tape 2814

Designed for UV resistance and clean removal.

Created for ultraviolet (UV) light resistance, 3M™ UV Resistant Masking Tape 2814 is an excellent choice for indoor and outdoor bundling, holding, sealing, paint masking and surface protection. The tape removes cleanly from most surfaces with little to no edge residue for up to 14 days even after outdoor exposure. It adheres to a variety of substrates and withstands temperatures up to 79°C for up to 30 minutes. With easy unwind and hand tearability, this cost-effective solution will come in handy for a wide variety of both indoor and outdoor masking applications.



UV resistance

UV resistant crepe paper tape maintains performance for up to 14 days outdoors.



Clean removal

Removes cleanly from most surfaces with little to no edge residue for up to 14 days.




Professional paint lines

Consistently delivers crisp paint lines, even after outdoor exposure.



Holding power

Adheres to a variety of substrates and conforms to irregular surfaces.

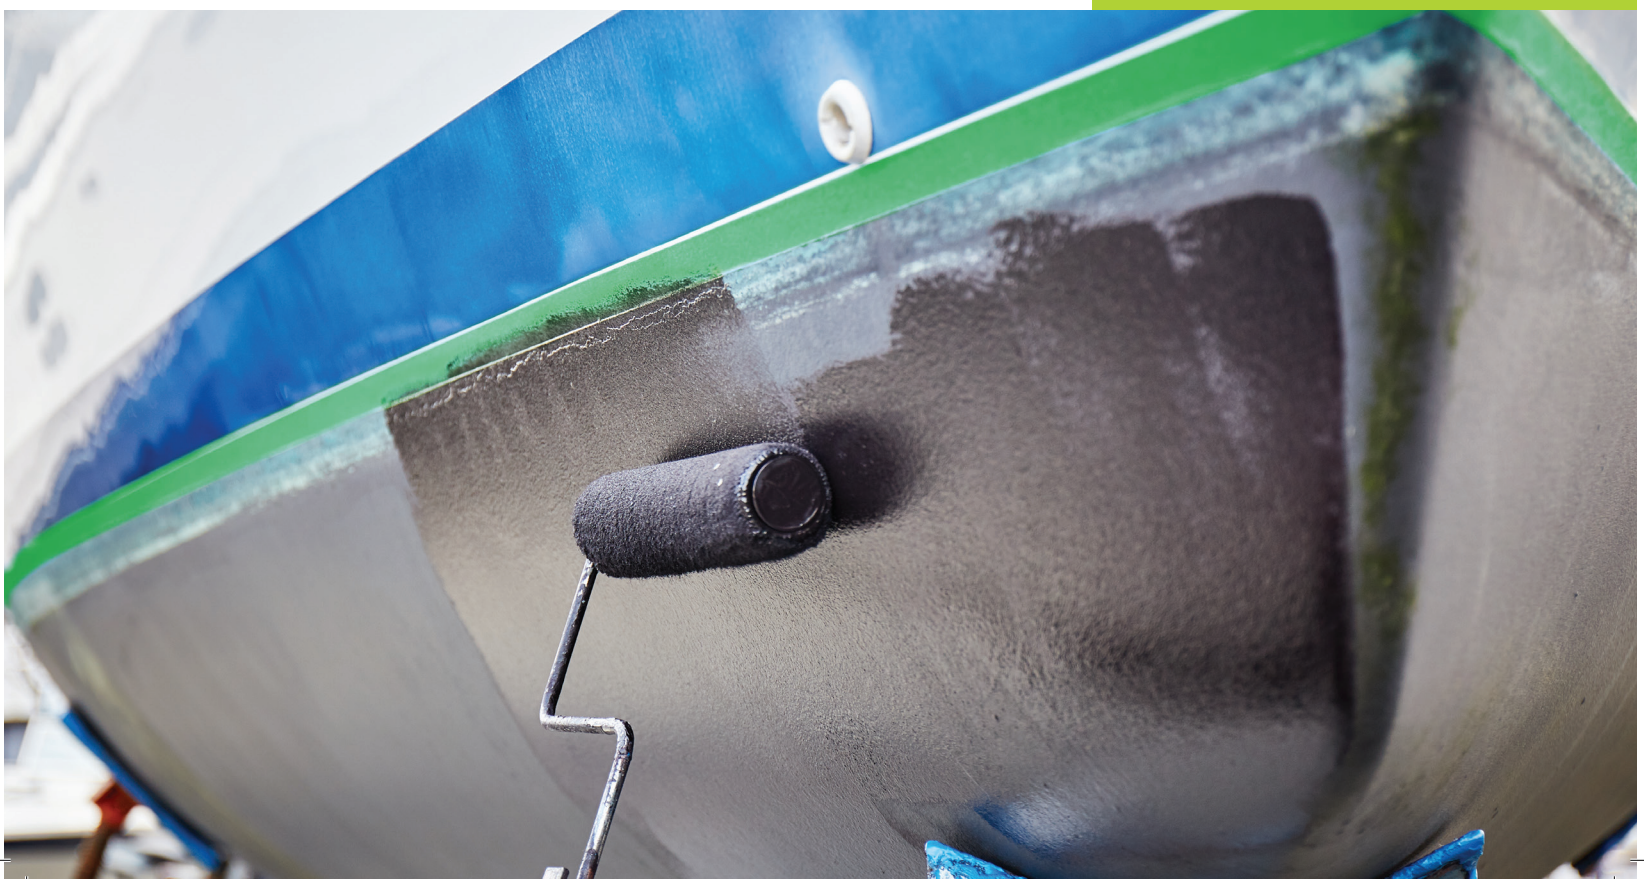

Versatile UV performance for indoor and outdoor masking.



3M™ UV Resistant Masking Tape 2814 offers 14 days of UV resistance without compromising on holding power or paint line quality.

3M™ UV Resistant Masking Tape 2814

Tape Structure (Backing/Adhesive)	Adhesion to Steel	Elongation at Break	Total Thickness	Width	Length	Rolls/Case	Color
Crepe Paper/ Rubber	2,8 N/cm	15%	0,12 mm	18 mm	50 m	72	Green
				24 mm	50 m	48	
				30 mm	50 m	32	
				36 mm	50 m	36	
				48 mm	50 m	24	
				72 mm	50 m	24	
				100 mm	50 m	24	



For more information on 3M Masking Solutions, please click or scan the QR code or contact your local 3M representative.



3M United Kingdom plc
3M Centre, Cain Road
Bracknell, Berkshire RG12 8HT
Phone 0870 6080050
Web www.3M.co.uk

3M Ireland Limited
The Iveagh Building
Carrickmines 18
Phone 353-1-280355
Web www.3Mireland.ie

Product use: All statements, technical information and recommendations contained in this document are based upon tests or experience that 3M believes are reliable. However, many factors beyond 3Ms control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the users knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the users method of application.

Warranty and Limited Remedy: 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for users application. If the 3M product is defective, your exclusive remedy and 3Ms and sellers sole obligation will be, at 3Ms option, to repair or replace the product or refund the purchase price.

Limitation of Liability: Except where prohibited by law, 3M and seller will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

3M is a trademark of 3M Company. Please recycle.
© 3M 2024. All rights reserved.